

**SECTION E CERTIFICATION**

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1-A30, AE, AH, A (with BFE), V1-V30, VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.


Reference level diagrams 6, 7 and 8 - Distinguishing Features-If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

*I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.*

CERTIFIER'S NAME <b>ROBERT B. NATIONS, JR.</b>		LICENSE NUMBER (or Affix Seal) <b>4111</b>	
TITLE <b>FLORIDA LAND SURVEYOR</b>		COMPANY NAME <b>LANDMARK SURVEYING SERVICES, INC.</b>	
ADDRESS <b>P.O. BOX 1148, 105 HIGHWAY 71</b>	CITY <b>WEWAHITCHKA,</b>	STATE <b>FLORIDA</b>	ZIP <b>32465</b>
SIGNATURE <i>Robert B. Nations, Jr.</i>		DATE <b>12/12/94</b>	PHONE <b>(904) 639-5611</b>

Copies should be made of this Certificate for: 1) community official, 2) insurance agent/company, and 3) building owner.

**COMMENTS:** THE BASE FLOOD ELEVATION AS SHOWN IN SECTION "B", ITEM 6, DETERMINED FROM CONTOUR INTERVALS ON BASE FLOOD INSURANCE RATE MAP. IT IS TO BE NOTED THAT GULF COUNTY HAS AN ORDINANCE WHICH STATES THAT THE LOWEST FLOOR ELEVATION OF A STRUCTURE IN A FLOOD PRONE AREA MUST BE A MINIMUM OF 1.0 FEET ABOVE THE BASE FLOOD ELEVATION AS DETERMINED FROM THE FLOOD INSURANCE RATE MAP, THEREFORE THE LOWEST FLOOR ELEVATION MUST BE AT A MINIMUM ELEVATION OF 16.1 FEET.

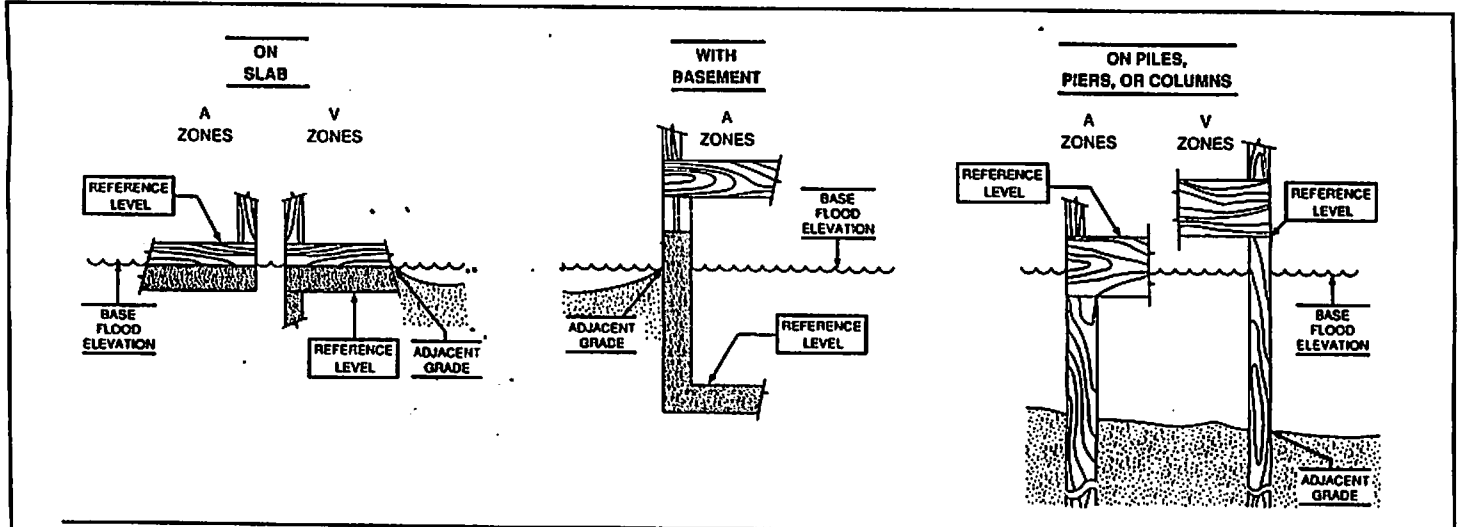

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.  
 Elevations for all A Zones should be measured at the top of the reference level floor.  
 Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.

